







TIMBER LOUVRE SCREEN

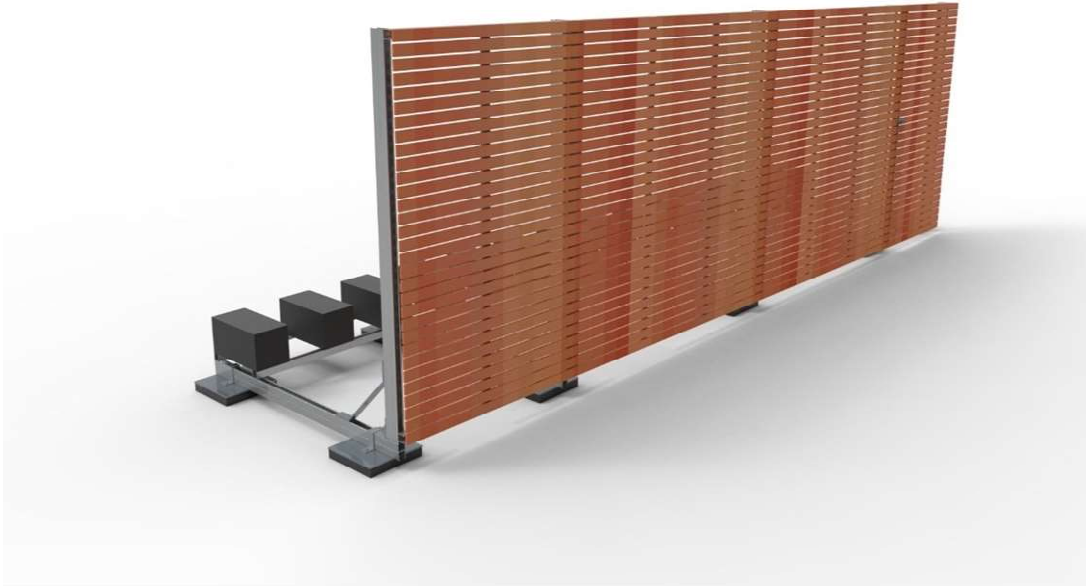

Any replication or use of it's design is strictly prohibited without our consent.

© PROPERTY OF USS MANUFACTURING LTD.

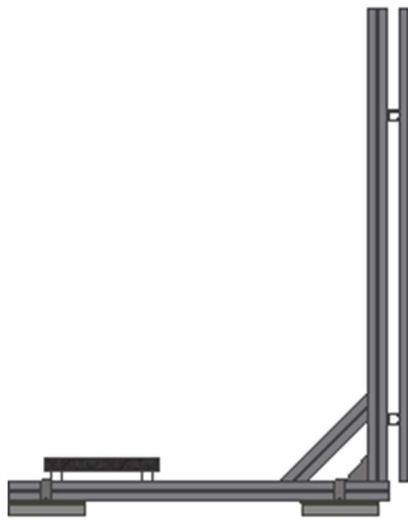

TECHNICAL DATA

Safety loads individually

Project application: To separate or covers Ahus units Chillers section & plant rooms ventilated

Roofing: Membrane and Bitumen

Frame Material: Mild steel BS EN 10025 Yield 280 N/mm²

Protection: HDB BS EN ISO 1461

Base Material: Closed cell polyethelene 67 kg/m³

Fasteners: BS 6946 BS EN Yield stress 170/mm 21

Panel Details: Material- Timber , Board size 1800mmx1800mmx35mm

Specifications: 15-year anti-rot guarantee

Pressure-treated

Designed to provide both natural light AND privacy

Smooth-planed wood slats

FSC®-certified wood

45mm x 14mm slats (space between individual slats 16mm)