







## UPVC LOUVRE SCREEN



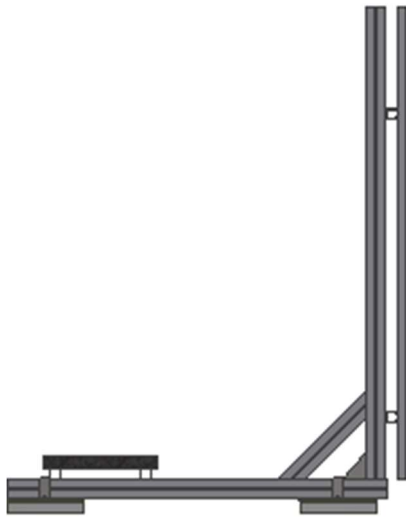

#### TECHNICAL DATA

Safety loads individually

Project application: To separate or covers Ahus units Chillers section & plant rooms ventilated

Roofing: Membrane and Bitumen

Frame Material: Mild steel BS EN 10025 Yield 280 N/mm<sup>2</sup>

Protection: HDB BS EN ISO 1461

Base Material: Closed cell polyethelene 67 kg/m<sup>3</sup>

Fasteners: BS 6946 BS EN Yield stress 170/mm 21

Panel Details: Material- UPVC – 28% Free area (Screening Blade)

Finish: All mullions and flashings and blades to be polyester powder coated to a standard RAL or BS4800 colour.